



# Camshelving® Premium Series

## Stationary Starter & Add-On Units 4 or 5 Solid Shelves

HEIGHT	DEPTHS	LENGTHS	
1	3	8	
84"	18"	24"	48"
	21"	30"	54"
	24"	36"	60"
		42"	72"

- **Starter Units include:**  
2 unassembled post kits, 8 or 10 shelf traverses and shelf plates.
- **Add-On Units include:**  
1 unassembled post kit, 8 or 10 shelf traverses and shelf plates.

All 84" high units ship in separate post kits and shelf kits due to overall unit weight.



### Features & Benefits

- Designed for use in high-volume operations with constant loading of heavy products and frequent daily deliveries.
- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised and space is maximized. No add-on clips or "S" hooks required.
- Use corner connectors to add shelves in corners or to install intermediate shelves between 2 starter units. Unique patented design ensures maximum space utilization.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Sturdy reinforced nylon foot adjusts easily to level units.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

AIA File / Spec No. \_\_\_\_\_

Job \_\_\_\_\_




Stationary Starter Unit



Stationary Add-On Unit

## 4 Shelf Unit Weight Bearing Chart

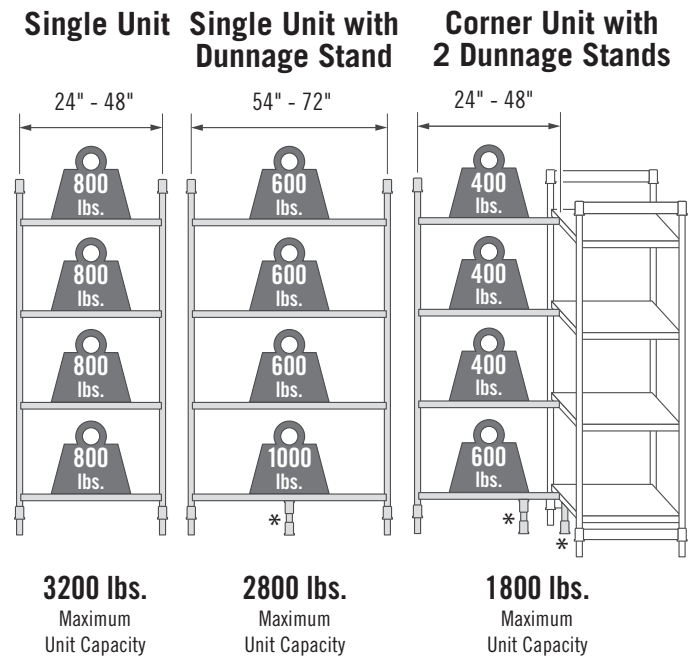

\* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads.

### Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.



Information and specifications are subject to change without notice. Please confirm at time of order.  
 © Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.  
 Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com  
 Printed in USA. REV. 11/16

# Camshelving® Premium Series

## Stationary Starter & Add-On Units 4 or 5 Solid Shelves

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

AIA File / Spec No. \_\_\_\_\_

Job \_\_\_\_\_

### S4PKG


#### 4-Shelf Solid Units

**84"**  
HEIGHT

Starter



Add-On



**18"**  
DEPTH

LENGTH	CODE
24"	CPU182484S4PKG
30"	CPU183084S4PKG
36"	CPU183684S4PKG
42"	CPU184284S4PKG
48"	CPU184884S4PKG
54"	CPU185484S4PKG
60"	CPU186084S4PKG
72"	CPU187284S4PKG

LENGTH	CODE
22½"	CPA182484S4PKG
28½"	CPA183084S4PKG
34½"	CPA183684S4PKG
40½"	CPA184284S4PKG
46½"	CPA184884S4PKG
52½"	CPA185484S4PKG
58½"	CPA186084S4PKG
70½"	CPA187284S4PKG

**21"**  
DEPTH

24"	CPU212484S4PKG
30"	CPU213084S4PKG
36"	CPU213684S4PKG
42"	CPU214284S4PKG
48"	CPU214884S4PKG
54"	CPU215484S4PKG
60"	CPU216084S4PKG
72"	CPU217284S4PKG

22½"	CPA212484S4PKG
28½"	CPA213084S4PKG
34½"	CPA213684S4PKG
40½"	CPA214284S4PKG
46½"	CPA214884S4PKG
52½"	CPA215484S4PKG
58½"	CPA216084S4PKG
70½"	CPA217284S4PKG

**24"**  
DEPTH

24"	CPU242484S4PKG
30"	CPU243084S4PKG
36"	CPU243684S4PKG
42"	CPU244284S4PKG
48"	CPU244884S4PKG
54"	CPU245484S4PKG
60"	CPU246084S4PKG
72"	CPU247284S4PKG


22½"	CPA242484S4PKG
28½"	CPA243084S4PKG
34½"	CPA243684S4PKG
40½"	CPA244284S4PKG
46½"	CPA244884S4PKG
52½"	CPA245484S4PKG
58½"	CPA246084S4PKG
70½"	CPA247284S4PKG

Color: Speckled Gray (480).


### S5PKG

#### 5-Shelf Solid Units

Starter



Add-On



LENGTH	CODE
24"	CPU182484S5PKG
30"	CPU183084S5PKG
36"	CPU183684S5PKG
42"	CPU184284S5PKG
48"	CPU184884S5PKG
54"	CPU185484S5PKG
60"	CPU186084S5PKG
72"	CPU187284S5PKG

LENGTH	CODE
22½"	CPA182484S5PKG
28½"	CPA183084S5PKG
34½"	CPA183684S5PKG
40½"	CPA184284S5PKG
46½"	CPA184884S5PKG
52½"	CPA185484S5PKG
58½"	CPA186084S5PKG
70½"	CPA187284S5PKG

24"	CPU212484S5PKG
30"	CPU213084S5PKG
36"	CPU213684S5PKG
42"	CPU214284S5PKG
48"	CPU214884S5PKG
54"	CPU215484S5PKG
60"	CPU216084S5PKG
72"	CPU217284S5PKG

22½"	CPA212484S5PKG
28½"	CPA213084S5PKG
34½"	CPA213684S5PKG
40½"	CPA214284S5PKG
46½"	CPA214884S5PKG
52½"	CPA215484S5PKG
58½"	CPA216084S5PKG
70½"	CPA217284S5PKG

24"	CPU242484S5PKG
30"	CPU243084S5PKG
36"	CPU243684S5PKG
42"	CPU244284S5PKG
48"	CPU244884S5PKG
54"	CPU245484S5PKG
60"	CPU246084S5PKG
72"	CPU247284S5PKG

22½"	CPA242484S5PKG
28½"	CPA243084S5PKG
34½"	CPA243684S5PKG
40½"	CPA244284S5PKG
46½"	CPA244884S5PKG
52½"	CPA245484S5PKG
58½"	CPA246084S5PKG
70½"	CPA247284S5PKG

### Optional Accessories

- Corner Connector Sets
- Bottom Shelf Dunnage Stands (Low or Tall)
- Shelf Identification Tags
- Wall Fastener
- Seismic Foot
- Shelf Divider Panel
- Shelf Divider Bars (Straight or Angled)
- Shelf Rails (Single or Double)
- Tray Sliding Rack
- Single Shelf Security Cage
- Full Wrap Security Cage
- Shelf Traverses (Single or Double)
- Drying and Storage Cradles

### Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.  
 Post Connectors: Reinforced polypropylene.  
 Shelf Plates: Reinforced polypropylene with Camguard® antimicrobial.  
 Corner Connectors: Reinforced nylon.  
 Adjustable Foot: Reinforced nylon.

### Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

**CAMBRO**  
 TRUSTED FOR GENERATIONS™  
 www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.

Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com

Printed in USA. REV. 11/16

PS6

D081602